

Installation

Thank you for purchasing this product. Read this manual first to ensure proper use of the product. After reading, store this manual in a safe place.

Step 1 Confirming the Contents of the Package

- TeraStation main unit..... 1
- Key for opening/closing front panel cover..... 2
* Store these keys in a safe place to prevent them being lost.
- Utility CD..... 1
- Quick Setup Guide..... 1
- ✓ Installation Manual..... 1
- AC cable..... 1
- LAN cable..... 1
- Warranty..... 1
If any additional sheets are included in the package, be sure to read them.

If there are any items missing, contact the place of purchase.

Add ✓ for each item you confirm have confirmed. The shape of the product may differ from that in the illustrations.


- Rack mounting bracket (A)..... 1 for each of left and right
- Rack mounting bracket (B) (long)..... 1 for each of left and right
- Rack mounting bracket (C) (short)..... 1 for each of left and right
- Thumb screw..... 4
- M4 screw..... 4
- Washer..... 4
- M5 screw..... 10
- Cage nut..... 10

Step 2 Installing TeraStation


Notes

- Note the following before you install this product.
 - Read the instruction manual of the rack carefully, and take sufficient care to ensure the rack will not fall over.
 - Do not place any object on the rack or TeraStation.
 - TeraStation is a precision device. Perform installation work carefully to ensure you do not drop it or subject it to an impact.
 - TeraStation weighs approximately 10 kg. Be careful!! Dropping it might damage it or injure yourself.
 - Perform this installation work carefully to ensure you do not hurt your hand on any of the metal parts.
 - Install TeraStation in an operating environment in which the temperature will be in the range of 5°C to 35°C and the humidity will be in the range of 20% to 80% during use.
 - The front and back panels of TeraStation have ventilation holes on them. Do not block these holes.


- 1** Use either the rack mounting brackets (A) and (B) or (A) and (C) depending on the depth of the mounting rack. Insert the thumb screws or M4 screws through the washers and then use them to fix the brackets together as shown in the figure below. Store the extra thumb screws or M4 screws in a safe place as spare parts.

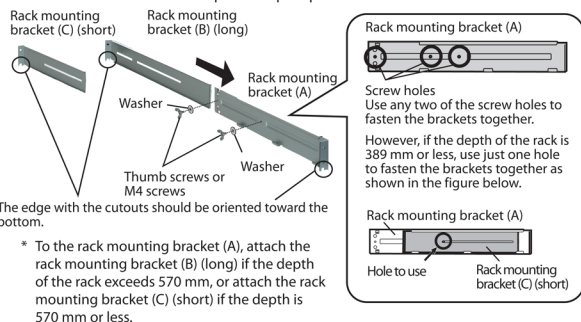

- 2** Attach the supplied cage nuts to the mounting holes of the rack (left and right of front and back).

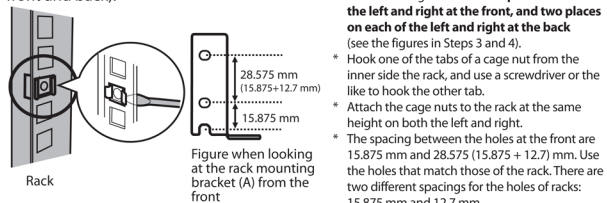


- 3** Use the supplied M5 screws to secure the rack mounting brackets (one for each of the left and right) you assembled in Step 1 to the rack.

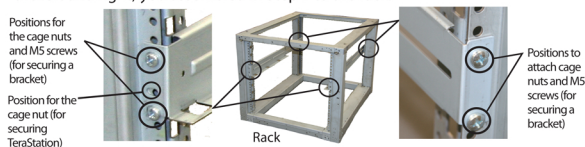

- * As shown in the photo, both the hole with the cutout and the very top hole are for securing the bracket to the rack with M5 screws. The middle hole is used for securing TeraStation.
- * 19 inch racks compliant with EIA standards are supported. TeraStation uses space for 2U.
- * A Phillips screwdriver is required to tighten the screws.

- 4** Insert TeraStation in the rack and secure it in place with the supplied M5 screws.

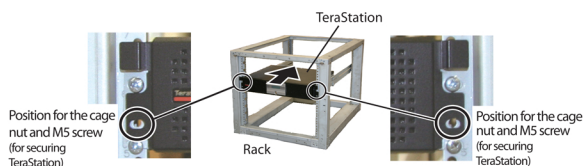


- 5** Connect the AC cable to the power socket on the back of TeraStation and then insert the plug into a power outlet. Then, connect the supplied LAN cable to the LAN port on the back of TeraStation.



The AC cable can be secured in place with the cable disconnection prevention band at the back as shown in the photo.

Note: When disconnecting the AC cable, remove the band while pulling the tab of the cable disconnection prevention band downwards.



- 6** Connect the other end of the LAN cable to a router, hub, switch, or PC on the network.



- 7** Press the power button on the front of TeraStation. The power light will begin to flash. After approximately 1 minute, it will change to a constantly lit state.



Note

- Follow one of the following procedures to shut down the TeraStation:
 - Hold down the power button on the front of TeraStation for 2 seconds.
 - Click [Maintenance] - [Shutdown] - [Apply] in the TeraStation's settings screen.
 Do not remove power from the TeraStation without shutting it down first!

- 8** Confirm that the LINK/ACT lamp on the front of TeraStation is lit green.



Your TeraStation is now installed.